

TECHNICAL SPECIFICATIONS

MACHINE	POUCH SIZE MIN.	POUCH SIZE MAX.	GUSSET MIN. /MAX.	MAX. VOLUME	OUTPUT P.P.M.	FILLING STATION	POUCH TYPE
H-440 FET	80 x 100	145 x 300	40 - 70	850 c.c.	up to 210	3	Stand up
H-440 FEQ	80 x 100	110 x 300	40 - 50	400 c.c.	up to 260	3	Stand up

Final speed will depend on product and film characteristics

Noise level < 80 Db	Max. Reel dimensions 800/600 mm. Ø	Electrical consumption 25 Kw	Reel core 76 (3")/152 (6") mm. Ø	Air consumption 700-800 l/min	Air pressure 6 bar
------------------------	---------------------------------------	---------------------------------	-------------------------------------	----------------------------------	-----------------------


The technology used incorporates both, simplicity and heavy duty construction, to enable maximum efficiency and minimum downtime.

Flexibility is another main aspect, as using the same machine it is possible to make a wide range of different pack presentations.

Change over simplicity and rapidity from one product to another or from size to size, makes Mespack machines unique with respect to any existing competitive machine.

QUADRUPLEX FEATURES

UP TO 110 MM WIDTH POUCHES

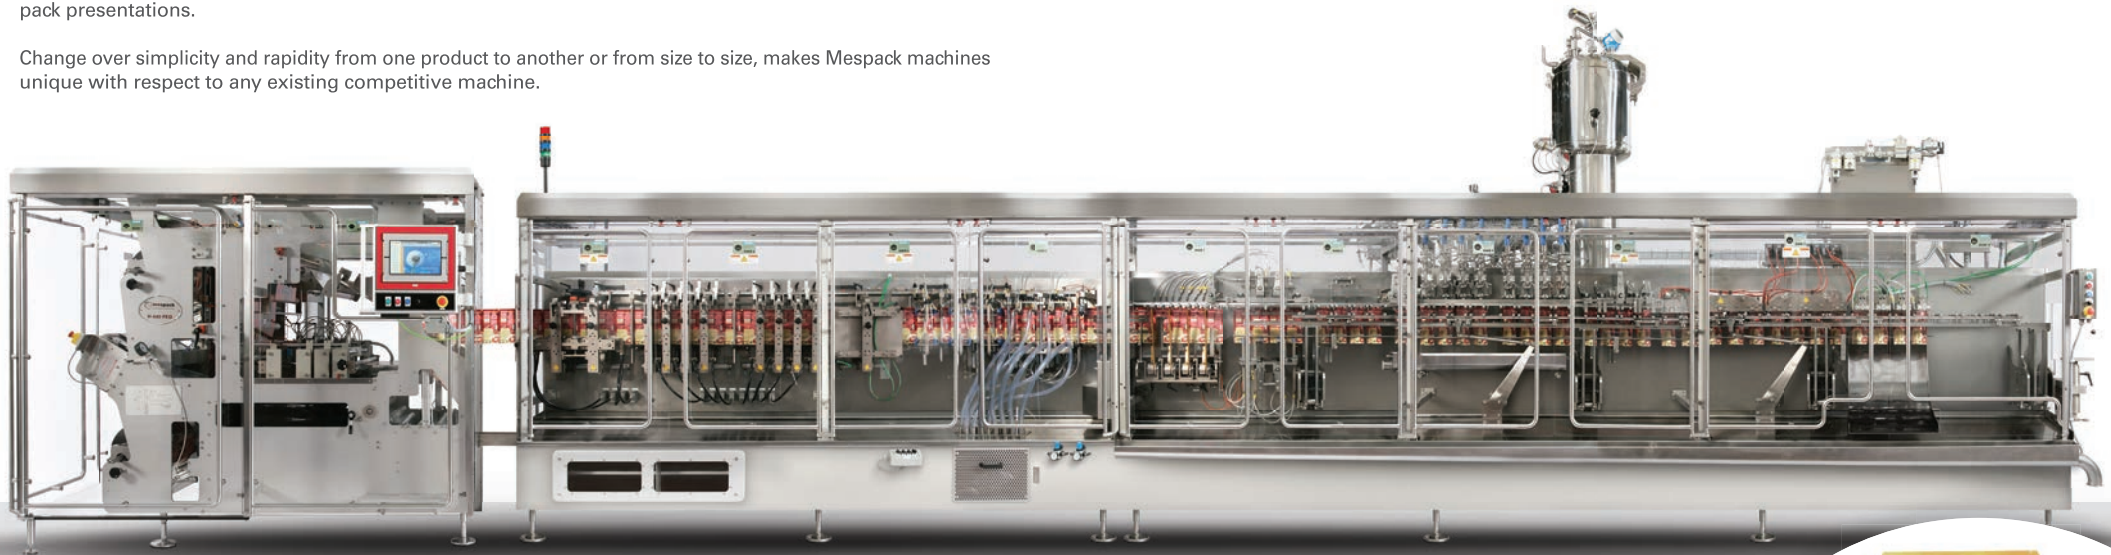

H-440

www.mespack.com

