





Drop type Metal Detectors



SD3-100CD/W-DF1710




SD3-3008D/W-Y-DF3010




*The sections indicated with dotted line are option.

Schematics of sorting operation

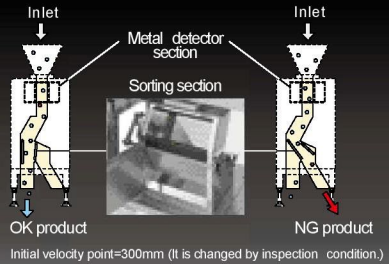

For inspection of rice, wheat flour, and plastic pellets, etc.

This model is suitable for inspection of products that drop naturally.
Sorting machine is incorporated.



Model		SD3-100CD/W-DF1710	SD3-3008D/W-Y-DF3010
Maximum passage width (mm)		φ 87	82×282
Detection sensitivity (mm)	Fe	φ 0.4	φ 0.5
	SUS304	φ 0.7	φ 1.0
Sorting method		Integrated damper-type sorter	
Power requirements		AC100V±10%, 50/60Hz, 120VA	
Air supply source		0.5~0.7Mpa	
Amount of processing(Reference value)		Minute powder...2t/h Soybean...4t/h	Minute powder...6t/h Soybean...12t/h
Mass(kg)		99	170