

We Build Confidence...

Designed for Postal Bar Coding


The Videojet 37pc ink jet printer is designed specifically to print postal bar codes, and delivers superior performance for mail piece identification. Accudrop® character generation provides significantly improved print quality at speeds up to 900 feet/min. (274 m/min.). This flexible system provides both POSTNET and "ID TAG" bar code capability from one printer. The 37pc system can apply POSTNET, Bar/No Bar (4mm), plus alphanumeric messages at speeds up to 1,479 characters/second or 4,327 bars/second.

Easy to use and Maintain

The standard configuration for the Videojet 37pc system includes the display and operator interface—the purchase of extra modules is not required. The context-sensitive, on-line help guides operators through set-up and production tasks. The user interface software is easy to use, with "guiding lights" to make programming easy, and to minimize errors. The keyboard can also be locked, so changes cannot be made without proper authorization. With only one control board in the unit, the Videojet 37pc printer is easy to troubleshoot, and provides easy access to internal components.

Designed to Save Space and Money

The small footprint of the 37pc unit allows it to fit into virtually any location within your system. The 37pc printer also provides decreased make-up consumption, along with reduced air and electrical power requirements, lowering your expenses. The 37pc printer is designed for maximum uptime.

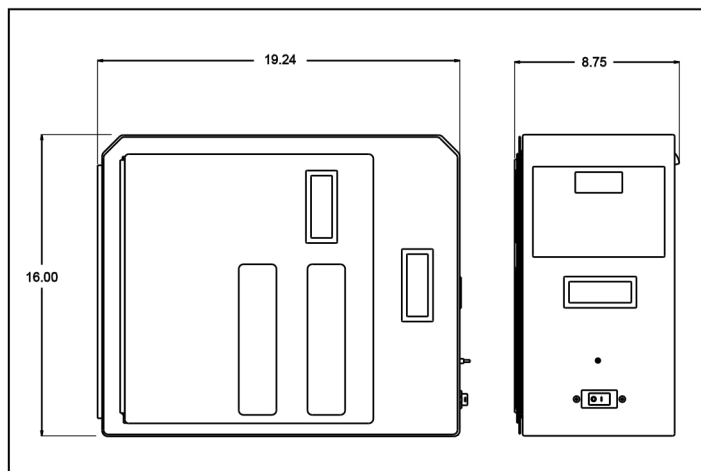

Specifications

Print Matrices

POSTNET bar code

Bar/No Bar (ID Tag) code

5x5 Accudrop single line alphanumeric text (improved readability over all previous postal coders)

Print Rate

POSTNET — 4,327 Bars/sec. max.

Bar/No Bar — 4,020 Bars/sec. max.

Text — 1,479 Characters/sec. max.

Keyboard

15- key keyboard with context sensitive help key

Display

20-character, 4-line LCD display

Printhead

Compact, stainless steel 1.38" (3.5 cm) diameter printhead

Printhead Cable

Vinyl-covered armored conduit

Optional 90-degree printhead available

Length: 10 feet (3 meters)

Temperature Range

40°F to 110°F (5°C to 43°C)

Humidity Range

10%-90% RH Non-Condensing

Air Requirements

70 PSI minimum to 100 PSI maximum, 0.7 SCFM (1189l/hr) at 70 PSI (4.80 bar), maximum

Electrical Requirements

100 to 240 VAC, 50/60 Hz. Power consumption: 30 watts

Shipping Weight

75 lbs. (33.75kg)